

Tel: +44 (0)1392 684000 Fax: +44 (0)1392 438445 www.vapormatic.com

New Product Update and Parts Information

NEW Slimline LED Lighting Range


Bulletin	UK	Export	Issued
1352	Yes	Yes	07/11/2016

NEW "Slimline" LED Lighting Range

To support the successful "Premium" LED work light range, Vapormatic has extended its LED work-light range and introduced a new Slimline category of affordable LED work lamps. The Slimline range of lamps are available in different sizes and with a flood beam pattern. All lights are manufactured with die-cast aluminium bodies along with tough, impact and chemical resistant polycarbonate lenses. All Slimline LED lights are E marked, ECE R10 certified and have IP67 protection.



VLC6135 - Slimline Square LED work light (Flood Beam)



- IP67 approved
- E-marked and ECE R10 approved Zero electrical interference.

Specifications:

- Flood beam pattern (wide working range)
- 5 x 3W LED Bulbs
- 950 Lumens (raw)
- 883 Lumens (effective)
- Voltage 9-32V
- Working temp: -40°C ~ +50°C
- Stainless steel mounting bracket (M8 bolt)
- Pre-wired 2 core cable (19cm)

Light dimensions:


- Diameter: 106mm

- Height: 137mm (From bottom of bracket)

- Depth: 35mm



- 5 x 3W LED's
- 883 effective lumens
- 35mm depth
- Flood beam
- Polycarbonate lens
- IP67 and E-marked
- 12 month warranty





Tel: +44 (0)1392 684000 Fax: +44 (0)1392 438445 www.vapormatic.com

New Product Update and Parts Information

NEW Slimline LED Lighting Range

Bulletin	UK	Export	Issued
1352	Yes	Yes	07/11/2016

VLC6136 - Slimline Round LED work light (Flood Beam)



This round LED work light is ideal for providing safe and productive field and close quarters night illumination. Powered by 6 x 3 watt LED's the light has a low current draw and low power consumption for a longer working life whilst reducing strain on your vehicle battery.

- IP67 approved
- E-marked and ECE R10 approved Zero electrical interference.

Specifications:

- Flood beam pattern (wide working range)
- 6 x 3W LED Bulbs
- 1100 Lumens (raw)
- 1023 Lumens (effective)
- Voltage 9-32V
- Working temp: -40°C ~ +50°C
- Stainless steel mounting bracket (M8 bolt)
- Pre-wired 2 core cable (19cm)

Measurements:

- Diameter: 116mm

- Height: 139mm (From bottom of bracket)

- Depth: 36mm



- 6 x 3W LED's
- 1023 effective lumens
- 36mm depth
- Flood beam
- Polycarbonate lens
- IP67 and E-marked
- 12 month warranty





Tel: +44 (0)1392 684000 Fax: +44 (0)1392 438445 www.vapormatic.com

New Product Update and Parts Information

NEW Slimline LED Lighting Range

Bulletin	UK	Export	Issued
1352	Yes	Yes	07/11/2016

VLC6137 - Slimline Oval LED work light (Flood Beam)

This oval LED work light is ideal for providing safe and productive field and close quarters night illumination. Powered by 8 x 3 watt LED's the light has a low current draw and low power consumption for a longer working life whilst reducing strain on your vehicle battery.

- IP67 approved
- E-marked and ECE R10 approved Zero electrical interference.

Specifications:

- Flood beam pattern (Wide working range)
- 8 x 3W LED Bulbs
- 1918 Lumens (raw)
- 1783 Lumens (effective)
- Voltage 9-32V
- Working temp: -40°C ~ +50°C
- Stainless steel mounting bracket (M10 bolt)
- Pre-wired 2 core cable (40cm)

Measurements:

- Diameter: 144mm

- Height: 123mm (From bottom of bracket)

- Depth: 65mm



- 8 x 3W LED's
- 1783 effective lumens
- 65mm depth
- Flood beam
- Polycarbonate lens
- IP67 and E-marked
- 12 month warranty





Tel: +44 (0)1392 684000 Fax: +44 (0)1392 438445 www.vapormatic.com

New Product Update and Parts Information

NEW Slimline LED Lighting Range

Bulletin	UK	Export	Issued
1352	Yes	Yes	07/11/2016

VLC6138 - Slimline Low Profile LED work light (Flood Beam)



This stylish, low profile, LED work light is ideal for roof-mounting or applications where height clearance or over-hanging branches cause problems. Powered by 6 x 3 watt LED's, the light has a low current draw and low power consumption for a longer working life whilst reducing strain on your vehicle battery.

- IP67 approved
- E-marked and ECE R10 approved Zero electrical interference.



- Flood beam pattern (Wide working range)
- 6 x 3W Epistar LED Bulbs
- 1350 Lumens (raw)
- 1255 Lumens (effective)
- Voltage 12-24V
- Working temp: -40°C ~ +50°C
- Stainless steel mounting bracket (M8 bolt)
- Pre-wired 2 core cable (40 cm)

- Fie-wiled 2 core cable (40 cm)

Measurements:

- Diameter: 160mm

- Height: 50mm (From bottom of bracket)

- Depth: 60mm



- 6 x 3W LED's
- 1255 effective lumens
- 50mm tall
- Flood beam
- Polycarbonate lens
- IP67 and E-marked
- 12 month warranty





Tel: +44 (0)1392 684000 Fax: +44 (0)1392 438445 www.vapormatic.com

New Product Update and Parts Information

NEW Slimline LED Lighting Range

Bulletin	UK	Export	Issued
1352	Yes	Yes	07/11/2016

VLC6139 - Slimline Round LED work light (Flood Beam)

This compact, round, LED work light is ideal for mounting in areas limited by space. Powered by 3 x 3 watt LED's, the light has a low current draw and low power consumption for a longer working life whilst reducing strain on your vehicle battery.

- IP67 approved
- E-marked and ECE R10 approved Zero electrical interference.

Specifications:

- Flood beam pattern (Wide working range)
- 3 x 3W Epistar LED Bulbs
- 600 Lumens (raw)
- 558 Lumens (effective)
- Voltage 12-24V
- Working temp: -40°C ~ +50°C
- Stainless steel mounting bracket (M8 bolt)
- Pre-wired 2 core cable (17 cm)

Measurements:

- Diameter: 83mm

- Height: 95mm (From bottom of bracket)

- Depth: 53mm



- 3 x 3W LED's
- 558 effective lumens
- Compact size
- Flood beam
- Polycarbonate lens
- IP67 and E-marked
- 12 month warranty





Tel: +44 (0)1392 684000 Fax: +44 (0)1392 438445 www.vapormatic.com

New Product Update and Parts Information


NEW Slimline LED Lighting Range

Bulletin	UK	Export	Issued
1352	Yes	Yes	07/11/2016


"Premium" Vapormatic LED Lighting Range

The existing Vapormatic LED lamps range in size, shape; illumination and lens options of trapezoid or flood pattern. All applications are manufactured with die cast aluminium bodies with acrylic lenses, have IP67/68 waterproof rating, expected LED life of up to 50,000 hours and are capable of working in temperatures from -30° C $\sim +50^{\circ}$ C.

Lens patterns:



Flood - producing a shorter beam with a wide coverage, Ideal for field and close quarters use.



Trapezoid - producing a longer beam with a slightly narrower width, Ideal for Highway use.

VLC6111 - Heavy Duty Work Lamp - LED, Square, Bottom Mount (Flood pattern)

This square, LED lamp is powered using 1 x 25W LED, comes with a stainless mounting bracket and hollow mounting stud. It's small in size but extremely effective.

Measurements:

Width: 90mm Height: 90mm Depth: 70mm

Specifications:

2000 Lumens (Raw and Effective)
1 x 25W LED
Voltage 12/24V
Colour temp 6000K
Waterproof rating: IP68

Features:

Stainless mounting bracket Body Material: Die cast aluminium Lens material: Acrylic resin Working temp: -30°C ~ +50°C







Tel: +44 (0)1392 684000 Fax: +44 (0)1392 438445 www.vapormatic.com

New Product Update and Parts Information

NEW Slimline LED Lighting Range

Bulletin	UK	Export	Issued
1352	Yes	Yes	07/11/2016

Heavy Duty Work Lamp - LED, Rectangle, Side Mount

This heavy duty rectangular, side mounted LED lamp is powered by 8 x 3 watt LED's, comes with a stainless mounting bracket and hollow mounting stud.

Flood Lens - VLC6115 Trapezoid Lens VLC6112

Measurements:

Width: 90mm Height: 150mm Depth: 90mm

Specifications:

1920 Lumens (Raw) 1600 Lumens (Effective) 8 x 3W LED's Voltage 12/24V Colour temp 6000K Waterproof rating: IP68



Stainless mounting bracket Body Material: Die cast aluminium Lens material: Acrylic resin Working temp: -30°C ~ +50°C





Heavy Duty Work Lamp - LED, Rectangle, Bottom Mount

This heavy duty rectangular, side mounted LED lamp is powered by 8 x 5 watt LED's, comes with a stainless mounting bracket and hollow mounting stud.

Flood Lens - VLC6113 Trapezoid Lens- VLC6116

Measurements:

Width: 160mm Height: 100mm Depth: 70mm

Specifications:

3200 Lumens (Raw) 2560 Lumens (Effective) 8 x 5W LED's Voltage 12/24V Colour temp 6000K Waterproof rating: IP68

Features:

Stainless mounting bracket
Body Material: Die cast aluminium
Lens material: Acrylic resin
Working temp: -30°C ~ +50°C







Tel: +44 (0)1392 684000 Fax: +44 (0)1392 438445 www.vapormatic.com

New Product Update and Parts Information

NEW Slimline LED Lighting Range

Bulletin	UK	Export	Issued
1352	Yes	Yes	07/11/2016

VLC6114 - Heavy Duty Sealed Beam LED, Roof mounted lamp (specific John Deere tractors)

This heavy duty sealed beam, roof mounted, LED lamp is powered by 4 x 3 watt LED's. This LED lamp is used as an application for specific John Deere tractors.

Measurements:

Width: 130mm Height: 50mm

Specifications:


960 Lumens (Raw) 720Lumens (Effective) 4 x 3W LED's Voltage 12/24V Colour temp 6000K Waterproof rating: IP68



Body Material: Die cast aluminium Lens material: Acrylic resin Working temp: -30°C ~ +50°C

Applications:

John Deere 6000 and 6010 series tractors.



VLC6087 – Heavy Duty Work Lamp - LED, Oval, Bottom Mount (Flood Pattern)

This heavy duty oval, base mounted LED lamp is powered by 8 x 3 watt LED's, comes with a stainless mounting bracket and hollow mounting stud.

Measurements:

Width: 140mm Height: 100mm Depth: 80mm

Specifications:

1900 Lumens (Raw) 1500 Lumens (Effective) 8 x 3W LED's Voltage 12/24V Colour temp 6000K Waterproof rating: IP67

Features:

Stainless mounting bracket Body Material: Die cast aluminium Lens material: Acrylic resin Working temp: -30°C ~ +50°C

Applications: John Deere Tractor – 7220, 7320, 7420, 7520, 7630, 7720, 7730, 7820, 7830, 7920, 7930, 8120, 8130, 8220, 8230, 8320, 8330, 8420, 8430, (2006-2009), 8520, 8530, 9120, 9220, 9230, 9320, 9330, 9420, 9430, 9520, 9620, 9630.





Tel: +44 (0)1392 684000 Fax: +44 (0)1392 438445 www.vapormatic.com

New Product Update and Parts Information

NEW Slimline LED Lighting Range

Bulletin	UK	Export	Issued
1352	Yes	Yes	07/11/2016

VLC6088 – Heavy Duty Work Lamp – LED, Square, Bottom Mount (Trapezoid Pattern)

This heavy duty square, base mounted LED lamp is powered by 16 x 3 watt LED's, comes with a stainless mounting bracket and hollow mounting stud.

Measurements:

Width: 115mm Height: 115mm Depth: 70mm

Specifications:

2880 Lumens (Raw) 1728 Lumens (Effective) 16 x 3W LED's Voltage 12/24V Colour temp 6000K Waterproof rating: IP67

Features:

Stainless mounting bracket Body Material: Die cast aluminium Lens material: Acrylic resin Working temp: -30°C ~ +50°C





VLC6089 - Heavy Duty Work Lamp - LED, Round, Bottom Mount (Trapezoid Pattern)

This heavy duty circular, base mounted LED lamp is powered by 9 x 3 watt LED's, comes with a stainless mounting bracket and hollow mounting stud.

Measurements:

Width: 125mm Height: 125mm Depth: 55mm

Specifications:

2016 Lumens (Raw) 1728 Lumens (Effective) 9 x 3W LED's Voltage 12/24V Colour temp 6000K Waterproof rating: IP67

Features:

Stainless mounting bracket
Body Material: Die cast aluminium
Lens material: Acrylic resin
Working temp: -30°C ~ +50°C







Tel: +44 (0)1392 684000 Fax: +44 (0)1392 438445 www.vapormatic.com

New Product Update and Parts Information

NEW Slimline LED Lighting Range

Bulletin	UK	Export	Issued
1352	Yes	Yes	07/11/2016

LED Lighting Quick Reference Table:

Part Number	Description	Effective Lumens	Range	Image
VLC6139	- 3 x 3W LED's - Compact size - Flood beam - Polycarbonate lens - IP67 and E-marked - 12 month warranty	558	Slimline	
<u>VLC6111</u>	- 1 x 25W LED - Compact size - Flood beam - Acrylic resin lens - IP68 and E-marked - 12 month warranty	2000	Premium	This is a second of the second
<u>VLC6135</u>	- 5 x 3W LED's - 40mm depth - Flood beam - Polycarbonate lens - IP67 and E-marked - 12 month warranty	883	Slimline	
<u>VLC6088</u>	- 16 x 3W LED's - Trapezoid beam - Acrylic resin lens - IP67 and E-marked - 12 month warranty	1728	Premium	
<u>VLC6136</u>	- 6 x 3W LED's - 36mm depth - Flood beam - Polycarbonate lens - IP67 and E-marked - 12 month warranty	1023	Slimline	
<u>VLC6089</u>	- 9 x 3W LED's - Trapezoid beam - Acrylic resin lens - IP67 and E-marked - 12 month warranty	1728	Premium	107.0



Tel: +44 (0)1392 684000 Fax: +44 (0)1392 438445 www.vapormatic.com

New Product Update and Parts Information

NEW Slimline LED Lighting Range

Bulletin	UK	Export	Issued
1352	Yes	Yes	07/11/2016

Part Number	Description	Effective Lumens	Range	Image
<u>VLC6137</u>	- 8 x 3W LED's - 65mm depth - Flood beam - Polycarbonate lens - IP67 and E-marked - 12 month warranty	1783	Slimline	
<u>VLC6113</u> / <u>6116</u>	- 9 x 3W LED's - Trapezoid beam & Flood beam - Acrylic resin lens - IP68 and E-marked - 12 month warranty	2560	Premium	
<u>VLC6138</u>	- 6 x 3W LED's - 47.5mm depth - Flood beam - Polycarbonate lens - IP67 and E-marked - 12 month warranty	1255	Slimline	
<u>VLC6087</u>	- 8 x 3W LED's - Flood beam - JD application - Acrylic resin lens - IP67 and E-marked - 12 month warranty	1500	Premium	
<u>VLC6115</u> / 6112	- 8 x 3W LED's - Flood beam & Trapezoid beam - Acrylic resin lens - IP68 and E-marked - 12 month warranty	1600	Premium	
<u>VLC6114</u>	- 4 x 3W LED's - JD application - Acrylic resin lens - IP68 and E-marked - 12 month warranty	720	Premium	



Tel: +44 (0)1392 684000 Fax: +44 (0)1392 438445 www.vapormatic.com

New Product Update and Parts Information


NEW Slimline LED Lighting Range

Bulletin	UK	Export	Issued
1352	Yes	Yes	07/11/2016

VZZ9046 - Lighting Shelf

The Vapormatic LED light bar is perfect for merchandising work lighting and beacons in store; fitting directly on to a Vapormatic wall bay or gondola.

The light bar can hold 6 lights and has the added bonus of a 12V auxiliary socket to demonstrate beacons with an aux type plug connection. The central channel cut out allows lights to be positioned exactly as required.

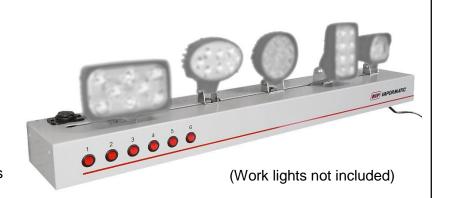

Lights are activated by illuminated numbered switches on the front of the display.

The light bar is simple to wire up and can be powered from any 12V power source.

All Vapormatic quality replacement parts carry an industry leading **12 month parts and labour warranty**. For further information on specific items please visit **www.vapormatic.com**

